

# SW Power Supplies 1, 2 and 3 Phase (24Vdc)



Thank you for having chosen one of our products for your work. We are certain the O.C.E. system Power Supplies will meet your application requirements.

### Application

The power supplies SW Series can be used in areas from extreme industrial environment, and complies with the latest technical standard. Before working with the unit, read these instructions carefully and completely. All these power supplies are single output, IP20, have Mounting DIN Rail IEC 60715/TH35. Class 1 isolation devices suitable for SELV and PELV solutions.

### Safety and warning notes



**WARNING – Explosion Hazard** Do not disconnect Equipment unless power has been switched off or the area is known to be non-hazardous.

**WARNING – Explosion Hazard.** Substitution of components may impair suitability for class I, Division 2.

**WARNING –** Switch off the system before connecting the module. Never work on the machine when it is live. The device must be installed in accordance with UL508. The device must have a suitable isolating facility outside the power supply unit, via which can be switched to idle. Danger of fatal injury!

### Connection:


**Cable Connection:** The following cable cross-sections may be used:

	Solid (mm <sup>2</sup> )	Stranded (mm <sup>2</sup> )	AWG	Torque (Nm)	Stripping Length	Power Supply
Input:	0.2 – 2.5	0.2 – 2.5	24 – 14	0.5 – 0.6 Nm	7 mm	Others
	4.0	6.0	30 – 10	0.8 – 1.0 Nm	7 mm	SW25A series
Output:	0.2 – 2.5	0.2 – 2.5	24 – 14	0.5 – 0.6 Nm	7 mm	Others
	4.0	6.0	30 – 10	0.8 – 1.0 Nm	7 mm	SW25A series
Signal:	0.2 – 2.5	0.2 – 2.5	24 – 14	0.5 – 0.6 Nm	7 mm	Others
	4.0	6.0	30 – 10	0.8 – 1.0 Nm	7 mm	SW25A series

The connection is made by the screw type 2.5 mm<sup>2</sup> or 4.0 mm<sup>2</sup> terminal blocks. Use only copper cables that are designed for operating temperatures of > 75 °C. Wiring terminal shall be marked to indicate the proper connection for the power supply.

### Input - Output power connection:

Input:	Output:
SWxxxxAF series	1 Phase Switching Power Supplies
SWxxxxBF series	1Phase Switching Power Supplies
SWxxxxBF series	2 Phase Switching Power Supplies
SWxxxx3F series	3 Phase Switching Power Supplies
	Nominal Voltage (Vdc) is made via the (+), (-).

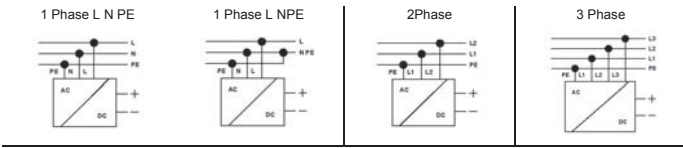


### Signalling:

Red led (Dc ok) status:	Jumper Setting
Output voltage OK: Lights up permanently	Hiccup Mode / Manual Reset / Continuous Mode
Switch off, in overload and short circuit conditions	Manual Reset / Continuous Mode
Blink, in overload and short circuit conditions	Hiccup Mode

### Parallel Connection, to Increase Output Power:


- Made parallel connection with same model of power supply to increase the output power.
- Adjust the output approximately to the same value (± 20mV) applying 1-2 A load to all devices output before connecting them in parallel.
- Easy parallel connection Jumper. In SW 15AMFL SW 25 AMFL SW 15ABF and SW 25AF3F for more power, you must change position of the jumper to enable parallel connection. In this mode you can put in parallel up to 4 power supply



### Parallel connection Redundancy:


Power supplies can be paralleled for 1+1 redundancy to obtain a higher system availability. Redundant systems require a certain amount of extra power to support the load in case one power supply unit fails. The simplest way is to put two SW power supplies in parallel. In case one power supply unit fails, the other one is automatically able to support the load current without any interruption. This simple way to build a redundant system has two major disadvantages:

- The faulty power supply can not be recognized. The red LED will still be ON since it is reverse-powered from the other power supply. It does not cover failures such as an internal short circuit in the secondary side of the power supply. In such a - virtually nearly impossible - case, the defective unit becomes a load for the other power supplies and the output voltage can not be maintained any more.
- This can only be avoided by utilizing decoupling diodes which are included in the Redundancy Module MR220. Recommendations for building redundant power systems:
  - Use separate input fuses for each power supply.
  - Monitor the individual power supply units. A DC-Red led and Power Good Contact are already included on SW power supplies. This feature reports a faulty unit; see power Good Section for any technical detail.
  - When possible, connect each power supply to different phases or circuits.



### Serial connection:

- It is possible to connect as many units in series as needed, providing the sum of the output voltage does not exceed 150Vdc.
- Voltages with a potential above 60Vdc are not SELV any more and can be dangerous. Such voltages must be installed with a protection against touching.
- For serial operation use power supplies of the same type.
- Earthing of the output is required when the sum of the output voltage is above 60Vdc.
- Keep an installation clearance of 15mm (left/right) between two power supplies and avoid installing the power supplies on top of each other. Note: Avoid return voltage (e.g. from a decelerating motor or battery) which is applied to the output terminals.




### Power Good Output Function (No SW 2.5AMF)



Output are used for preventive function monitoring of the power supply. An electrically isolated signal contact is available. The signal contact Closes when output power is OK and Opens when output voltage falls below 20Vdc +5%. This feature is particularly useful in redundant applications.

Power Good Contact rating:  
 Max. DC1: 30 Vdc 1 A;  
 AC1: 60 Vac 1 A  
 Min.: 1mA at 5 Vdc  
 Min permissible load



### Protection:


- On the primary side:** the device is equipped with an internal fuse; follow the next page table. If the internal fuse is blown (fails opens), it is most probable that there is a fault in the device. If this failure occurs, the device must be checked in the factory. **Caution:** in two phase Input models, Double pole / Neutral Fusing.
- On the secondary side:** the devices are electrically protected against: Over Load, Over Voltage Output (typ.35 Vdc), and Short circuit automatically.

### Short circuit and overload Protections Mode:

Depending on the users application loads, the SW offers three types of protection modes which are available by removing the plastic window and changing the Jumper to the desired setting as shown below:  
 (No Settings jumper for SW 2.5AMF only Continuous Mode Connection)


#### 1) HICCUP MODE (default factory Jumper setting)

General purpose mode, used for normal load. In case of short-circuit or overloading, the output current is interrupted. The device tries again to re-establish output voltage and normal condition about every 2 second till the problem is cleared.

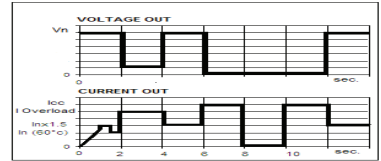


#### 2) MANUAL RESET (manual Restart by Operator)

This protection mode is particularly suggested in applications where safety procedures require that reset be carried out only by an authorized person. In case of short-circuit or overload, the output current is interrupted. In order to restart the output it is necessary to switch-off the input circuit for about 1 – 5 minutes.

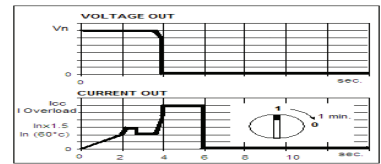

#### 3) CONTINUOUS OUTPUT MODE


In case of short-circuit or overload, the output current is kept at high values with near zero voltage. In case of short circuit the current can reach up to 3 times the rated current at 60°C. This protection mode is used to meet the requirements of demanding loads such as motors, solenoid valves, lamps, PLC with highly capacitive input circuits and other loads with marked transient overload behavior

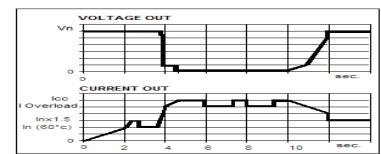

The output of the device is electrically protected against overload and short circuit. For the nominal voltage and nominal current at temperature condition, please see technical data. The device can supply at the nominal Current without switching off. As the overload increases, the output voltage is reduced until zero.

### Temperature Ratings


Surrounding air temperature 50 °C for SW 2.5AMF, for the other 60°C. At the temperature of 70°C the output current will be 75% - 50% of In. The equipment does not switch off in case of ambient temperature above 70°C or thermal overload. The devices are protected for Over temperature conditions "worst case"; in this situations the device Shut-down the output and automatic restart when temperature inside fall.



### Standards and Certification


- Electrical Safety:** Assembling device: UL508, IEC/EN 60950 (VDE 0805) and EN 50178 (VDE 0160). Installation according: IEC/EN 60950. Input / Output separation: SELV EN 60950-1 and PELV EN 60204-1. Double or reinforced insulation.
- EMC Standards Immunity:** EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5.
- EMC Standards Emission:** EN 61000-6-4, EN 61000-3-2.
- Standards Conformity:** Safety of Electrical Equipment Machines: EN 60204-1.
- CE The CE mark in According to EMC 2004/108/EC and Low voltage directive 2006/95/EEC Conformity UL 508

### Rail Mounting:

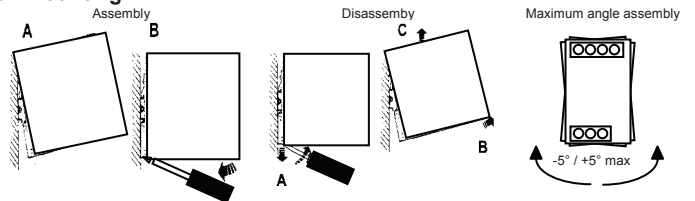

Other models / modules must have a minimum vertical and horizontal distance of 10 cm to this power supply in order to guarantee sufficient auto convection. Depending on the ambient temperature and load of the device, the temperature of the housing can become very high!

### Dimension and Lay-out:

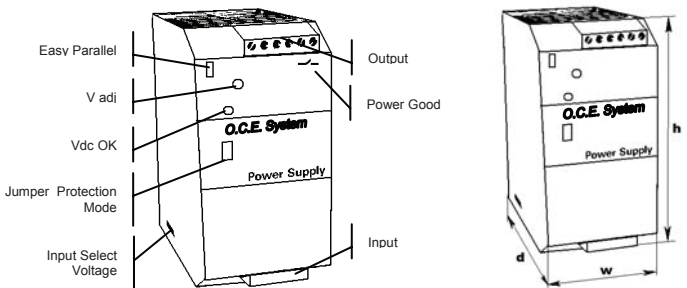

SW	1 Phase (Input 115 – 230Vac) (22 - 27Vdc)			2 and 3Phase (Input 400 – 480Vac) (22 - 27Vdc)		
	power supply					
<b>TECHNICAL DATA</b>						
Model	SW 2.5AMF	SW 5AM1FL	SW 15AM1FL	SW 25AM1FL	SW 7.5ABF	SW 25AF3F
Wattage	40-70W	95-120W	240-330W	480-600W	120-180W	480-600W
<b>INPUT DATA</b>						
Nominal Input Voltage / Tensione d'ingresso nominale	115 – 230Vac	115 – 230Vac	115 – 230Vac	115 – 230Vac	230 – 400 – 500Vac	230 – 400 – 500Vac
Input Voltage Range / Campo di funzionamento	90 – 264Vac	90 – 135Vac 180 – 264Vac	90 – 135Vac 180 – 264Vac	90 – 135Vac 180 – 264Vac	187 – 264Vac 330 – 550Vac	187 – 264Vac 330 – 550Vac
Inrush Current (Vn and In Load) <sup>(1)</sup> / Corrente di Iniezione	≤ 7 A ≤ 5msec	≤ 11 A ≤ 5msec	≤ 16 A ≤ 5msec	≤ 16 A ≤ 5msec	≤ 17 A ≤ 5msec	≤ 17 A ≤ 5msec
Frequency / Frequenza di ingresso	47 – 63 Hz ±6%	47 – 63 Hz ±6%	47 – 63 Hz ±6%	47 – 63 Hz ±6%	47 – 63 Hz ±6%	47 – 63 Hz ±6%
Input Current / Assorbimento	1.0 – 0.7A	2.8 – 1.3A	3.3 – 2.2A	4.5 – 4.2 A	1.5 – 0.8 – 0.7 A	2.2 – 1.4 – 1.0A
Internal Fuse / Fusibile interno (non sostituibile)	4A	4A	4A	4A	4A	6.3A
External Fuse (recommended) / Fusibile Esterno raccomandato	6A	10A	10A	16A	10A	16A
<b>OUTPUT DATA</b>						
Output Voltage / Factory Setting ±3% / Tensione di Uscita – (Vn)	24Vdc	24Vdc	24Vdc	24Vdc	24Vdc	24Vdc
Adjustment range / Campo di regolazione (Vadj)	22 – 27Vdc	22 – 27Vdc	22 – 27Vdc	22 – 27Vdc	22 – 27Vdc	22 – 27Vdc
Start up with capacitive load / Start up con carichi capacitivi	≤ 50.000µF	≤ 50.000µF	≤ 50.000µF	≤ 50.000µF	≤ 50.000µF	≤ 50.000µF
Turn-On delay after applying mains voltage / Accensione con tensione di rete	1.5 sec. (max)	1 sec. (max)	1 sec. (max)	1 sec. (max)	1 sec. (max)	1 sec. (max)
Continuous Current at 24 V < 40°C (In) / Corrente Continua	2.0A(115) – 3.0A(230)	5.0A	7.5A	25A	5.0A	14A
Continuous Current at 24 V < 50°C (In) / Corrente Continua	1.5A(115) – 2.5A(230)	4.5A	6.0A	22A	4.5A	12A
Continuous Current at 24 V < 60°C (In) / Corrente Continua	-	4.0A	5.0A	20A	4.0A	10A
Power Boost Current / Corrente di Boost (at 24Vdc 60°C ≤ 3min.)	3.5A	5.0A	7.5A	25A	5.0A	14A
Current Max Overload approx. 4Vdc (permanent) / Corrente di sovraccarico (permanente)	In 60°C x (1.8 – 2.2)	In 60°C x (1.8 – 2.2)	In 60°C x (1.8 – 2.2)	In 60°C x (1.8 – 2.2)	In 60°C x (1.8 – 2.2)	In 60°C x (1.8 – 2.2)
Short circuit current (Icc) / Corrente di corto circuito	7.0A	16A	30A	60A	16A	30A
Hold-up Time (min. Vac) / Tempo di arresto	Typ. 20 msec	Typ. 20 msec	Typ. 20 msec	Typ. 20 msec	Typ. 20 msec	Typ. 20 msec
Residual Ripple / Ripple Residuo	≤ 80 mVpp	≤ 80 mVpp	≤ 80 mVpp	≤ 80 mVpp	≤ 80 mVpp	≤ 80 mVpp
Efficiency (50% of In) / Rendimento tipico	≥ 88%	≥ 91%	≥ 91%	≥ 92%	≥ 91%	≥ 92%
Dissipation power load max (W) / Potenza dissipata	6	11	17	54	17	54
<b>CLIMATIC DATA</b>						
Ambient Temperature operation / Temperatura Ambiente di Lavoro	-25 – +70°C	-25 – +70°C	-25 – +70°C	-25 – +70°C	-25 – +70°C	-25 – +70°C
De rating T <sub>a</sub> > (In) / De rating T <sub>a</sub> > (In)	> 50° 2.5% °C	> 60° 2.5% °C	> 60° 2.5% °C	> 60° 2.5% °C	> 60° 2.5% °C	> 60° 2.5% °C
Ambient Temperature Storage / Temperatura max. Magazzino	-40 – +85°C	-40 – +85°C	-40 – +85°C	-40 – +85°C	-40 – +85°C	-40 – +85°C
Humidity at 25 °C / Umidità	95% to 25°C	95% to 25°C	95% to 25°C	95% to 25°C	95% to 25°C	95% to 25°C
<b>GENERAL DATA</b>						
Isolation Voltage (IN / OUT) / Tensione di isolamento. (IN / OUT)	3000Vac	3000Vac	3000Vac	3000Vac	3000Vac	3000Vac
Isolation Voltage (IN / PE) / Tensione di isolamento (IN / TERRA)	1605Vac	1605Vac	1605Vac	1605Vac	1605Vac	1605Vac
Isolation Voltage (OUT / PE) / Tensione di isolamento (OUT / TERRA)	500Vac	500Vac	500Vac	500Vac	500Vac	500Vac
Protection Class (EN/IEC 60529) / Protezione Classe	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Reliability (MTBF IEC 61709) / Affidabilità	> 500 000 h	> 500 000 h	> 500 000 h	> 500 000 h	> 500 000 h	> 500 000 h
Pollution Degree Environment / Grado d'inquinamento ambientale	2	2	2	2	2	2
Connection Terminal Blocks Screw Type / Dimensione morsetti	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm
Protection class (with PE connected) / Grado di protezione (con cavo di terra collegato)	I	I	I	I	I	I
Dimension (w-h-d) / Dimensioni (l-h-p) mm	50x120x50 mm	55x110x105 mm	72x115x135 mm	85x120x140mm	55x110x105 mm	72x115x135 mm
Weight / Peso	0.30 kg approx	0.50 kg approx	0.72 kg approx	1.1 kg approx	0.60 kg approx	1.0 kg approx

**CE** and actual EN standard. Completely made in Italy e attuali norme EN. Costruiti interamente in Italia.

All specification are subject to change without notice

2 years full warranty with free replacement of items that are not ok

info@oceality.it